

www.haulotte.com

COMPACT 8 W COMPACT 10 / 12

Exceptional productivity

- Load capacity up to 450 kg (C8W and C10)
- > Driveable at full height
- Both inside and outside use with the same load capacity
- > Extended platform
- ➤ Width of 1.20 m
- ➤ Long working cycles

Robust, reliable, easy to maintain









More than lifting

COMPACT 8 W / 10 / 12

ELECTRIC SCISSOR LIFTS

Working height 8.25 m 10.15 m 12 m Platform height 6.25 m 8.15 m 10 m Driveable at full height up to 6.25 m 8.15 m 10 m Lift capacity - inside 450 kg 450 kg 300 kg Lift capacity - outside 450 kg 450 kg 300 kg A Platform length - outside 2.3 m 2.3 m 2.3 m B Platform length - extended 3.22 m 3.22 m 3.22 m Length - extension 0.92 m 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m 1.2 m E Storage height 1.28 m 1.4 m 1.53 m
Driveable at full height up to 6.25 m 8.15 m 10 m Lift capacity - inside 450 kg 450 kg 300 kg Lift capacity - outside 450 kg 450 kg 300 kg A Platform length - outside 2.3 m 2.3 m 2.3 m B Platform length - extended 3.22 m 3.22 m 3.22 m Length - extension 0.92 m 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m
Lift capacity - inside 450 kg 450 kg 300 kg Lift capacity - outside 450 kg 450 kg 300 kg A Platform length - outside 2.3 m 2.3 m 2.3 m B Platform length - extended 3.22 m 3.22 m 3.22 m Length - extension 0.92 m 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m 1.2 m
Lift capacity - outside 450 kg 300 kg A Platform length - outside 2.3 m 2.3 m B Platform length - extended 3.22 m 3.22 m Length - extension 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m
A Platform length - outside 2.3 m 2.3 m 2.3 m B Platform length - extended 3.22 m 3.22 m 3.22 m Length - extension 0.92 m 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m 1.2 m
B Platform length - extended 3.22 m 3.22 m Length - extension 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m 1.2 m
Length - extension 0.92 m 0.92 m 0.92 m C Platform width - outside 1.2 m 1.2 m 1.2 m
Platform width - outside 1.2 m 1.2 m
Storage height 1.28 m 1.4 m 1.53 m
1) Height - stowed 2.14 m 2.26 m 2.38 m
© Overall width 1.2 m 1.2 m
G Length 2.45 m 2.45 m 2.45 m
⊕ Wheelbase 1.86 m 1.86 m 1.86 m
Ground clearance - Centre 13 cm 13 cm 13 cm
Ground clearance - Pothole guards deployed 2.5 cm 2.5 cm 2.5 cm
Drive speed 1 - 3.5 km/h 1 - 3.5 km/h 0.9 - 3,5 km/h
Gradeability 23 % 23 % 23 %
Tilt 2° 2° 2°
Lift / lower speed 56 s / 44 s 51 s / 42 s 83 s / 52 s
Turning radius - outside 2.5 m 2.5 m 2.5 m
Tyres - non marking 15x5 15x5 15x5
Batteries 24 V - 255 Amph (C5) 24 V - 255 Amph (C5) 24 V - 255 Amph (C5)
Hydraulic system capacity 25 l 25 l 25 l
Weight 1950 kg 2330 kg 2470 kg

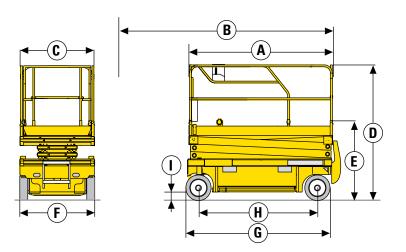

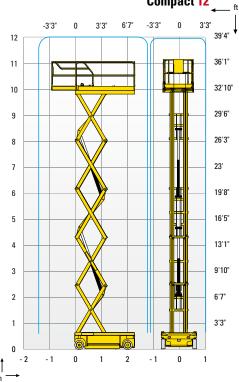

STANDARD EQUIPMENT

- Pothole guards
- Battery charge indicator
- Proportional lift and drive
- Removable control box in platform
- Swing out component tray
- Battery charger with automatic stop
- Solid non-marking tyres
- Free wheeling device
- Tilt controller
- Load Management System in the platform
- Manual platform lowering valve
- Integrated forklift pockets
- Towing hooks
- Horn
- Hourmeter

OPTIONS AND ACCESSORIES

- Flashing light
- Travel alarm
- Working light
- Power to platform
- Biodegradable hydraulic oil
- Folding guardrails
- Maintenance-free batteries
- Traction batteries
- Centralised battery filling